



Corvus Blue Marlin

The Blue Marlin is a unique ESS where Corvus Energy has combined its industry leading research with the development capabilities and knowledge gained from having the largest global installed base of Energy Storage Systems solutions. The result is a new cutting edge ESS with performance nearing a capacitor with improved energy density.


The Corvus Blue Marlin is designed for use in any application in need of short peaks of high power. It has industry-leading design with no manual connections, enhanced reliability and the highest level of safety.


Applications

- Offshore drilling platforms
- Jack-ups
- Semi- submersible rigs
- Drilling vessels

Features

- Highest C-rate in the industry, 550C peak
- Very long life and minimal self-discharge
- Designed for voltages up to 1094 VDC
- Low installation and commissioning time
- Low life cycle cost
- Enhanced reliability with contained power connections
- Very flexible and modularised design
- Passive single cell Thermal Runaway protection
- Scalable capacity and voltage according to vessel requirements
- Industry-proven Battery Management System (BMS)
- Remote monitoring capabilities
- Enhanced EMI immunity design for maritime environments

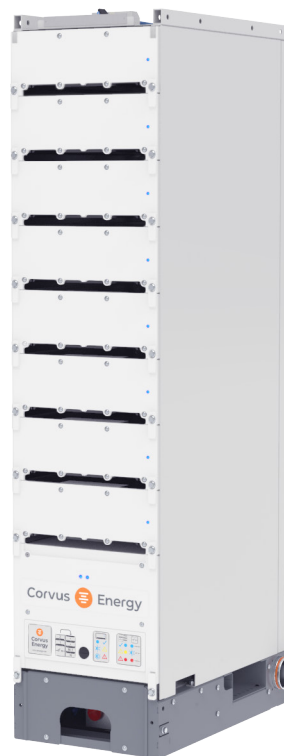

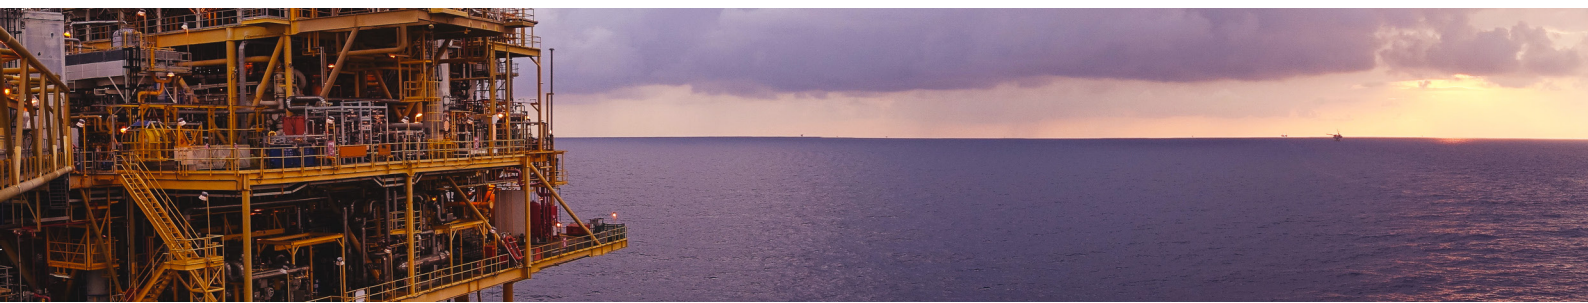

Technical Specifications | Corvus Blue Marlin

Performance Specifications

C-Rate - Peak (Discharge / Charge)	550C / 550C for 10 seconds
C-Rate - Continuous (Discharge / Charge)	200C / 200C

System Specifications

Single Module Size / Increments	110 Wh / 137 VDC
Single Pack Range	330-880 Wh / 410-1094 VDC
Max Gravimetric Density - Pack	339 W/kg (Continuous)
Max Volumetric Density - Pack	315 W/l (Continuous)

Example Pack - 8 Modules

Power, Peak and Continuous	529 kW and 190 kW
Energy	880 Wh
Voltage	Max: 1094 VDC Nom: 864 VDC Min: 634 VDC
Dimensions	Height: 1874 mm Width: 434 mm Depth 740 mm 560 kg

Safety Specifications

Thermal Runaway Anti-Propagation	Passive cell-level thermal runaway isolation
Fire Suppression Recommended	Per SOLAS, class and Corvus recommendation
Short Circuit Protection	Fuses included
Emergency Stop Circuit	Hard-wired
Ground Fault Detection	Integrated
Disconnect Switchgear Rating	Full load

General Specifications

Class Compliance	DNV GL, Lloyds Register, Bureau Veritas, ABS
Type Approval	Pending
Ingress Protection	System: IP44
Cooling	Liquid Cooling
Vibration and Shock	UL 810A, DNVGL-CG-0339, IEC 60068-2-6
EMC	IEC 61000-4, IEC 60945-9, CISPR16-2-1